


Roof curb

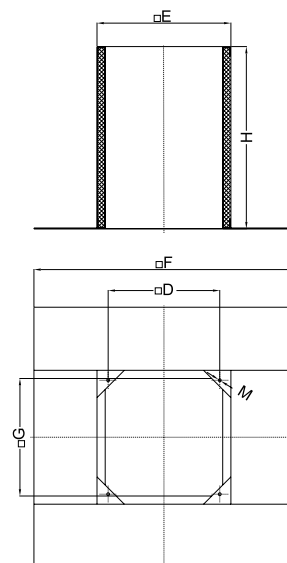

 Kaminėlis KS pagamintas iš cinkuoto plieno. Skirtas stogi-
nių ventiliatorių VSV montavimui ant plokščio stogo. Izolia-
cijos storis 50 mm.

 Used for the mounting of roof fans VSV on flat roofs. Made
of galvanized steel. Thickness of insulation is 50 mm.

 Dachsockel ist aus verzinktem Stahl hergestellt. Er ist für
die Montage von Dachventilatoren VSV auf plattem Dach
bestimmt. Isolationsdicke 50 mm.

 Изготовлен из оцинкованной стали. Для монтажа крыш-
ных вентиляторов VSV на плоской крыше. Толщина изо-
ляции 50 мм.

Dimensions

Type	D, [mm]	E [mm]	F [mm]	G [mm]	M [mm]	H [mm]
KS 250	245	324	590	260	M6	300
KS 311	330	395	657	324	M6	300
KS 355/400	450	575	817	504	M10	300
KS 450/500	535	655	877	585	M10	300
KS 560/630	750	895	1147	825	M10	300
KS 710	840	985	1300	915	M10	300