


Roof curb

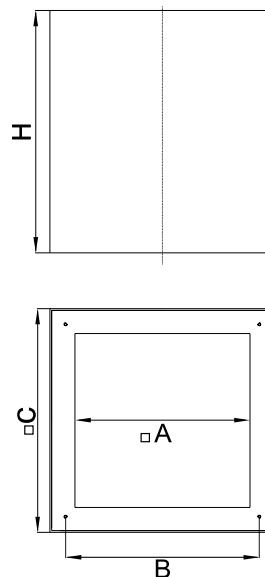

 Kaminėlis KSV pagamintas iš cinkuoto plieno. Skirtas stogi-
nių ventiliatorių VSA montavimui ant plokščio stogo. Izolia-
cijos storis 50 mm.

 Used for the mounting of roof fans VSA on flat roofs. It also
works as a silencer. Made of galvanized steel. Thickness of
insulation is 50 mm.

 Dachsockel ist aus verzinktem Stahl hergestellt. Er ist für
die Montage von Dachventilatoren VSA auf plattem Dach
bestimmt. Isolationsdicke 50 mm.

 Изготовлен из оцинкованной стали. Для монтажа крыш-
ных вентиляторов VSA на плоской крыше. Толщина изо-
ляции 50 мм.

Dimensions

Type	Application	A, [mm]	B, [mm]	H, [mm]	C, [mm]
KSV 300/600	VSA 175M, VSA 190 L	190	245	600	295
KSV 300/800		190	245	800	295
KSV 300/900		190	245	900	295
KSV 400/600	VSA 220S, VSA 220M, VSA 225L, VSA 250L	290	330	600	395
KSV 400/800		290	330	800	395
KSV 400/900		290	330	900	395
KSV 400/1000		290	330	1000	395